



5.12kwh Hybrid Solar Wall Mount Lifepo4 Battery All In One For Residential

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-5120W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



Product Specification

- Series: 51.2V100Ah
- Full Charge Capacity: 5.12kwh
- Working Voltage: 51.2V
- Cell Type: LiFePO4 Cell
- Communication Interface: RS485, RS232, CAN
- Internal Impedance: $\leq 0.8\text{m}\Omega$
- Standard Charge Voltage: 58.4V
- Max Charge Current: 40A
- Parallels Function: Support 8 Units In Parallels
- Discharge Cut-off Voltage: 40V
- Highlight: 5.12kwh Wall Mount Lifepo4 Battery,
Solar Wall Mount Lifepo4 Battery,
Hybrid Residential Lifepo4 Battery

Product Description

5.12kwh Hybrid Solar System Wall Mounted Type Power Station Home Lifepo4 Cell Lithium All In One Solar Energy Systems

Residential Application of Wall Mounted Lifepo4 Battery

Residential energy system makes green energy 24/7 available.
 Store daytime energy from photovoltaic and makes it available at any time.
 Peak shaving and valley filling, intelligent purchase or sale of electricity from the power grid, save and earn money.
 Rural areas where the power grid hardly covers can have stable and cheap electricity from PV system using ESS
 It can be used as an UPS power when an unexpected interruption occurs.
 Higher fuel efficiency with oil-fired power generation.

Bms protection of Wall Mounted Lifepo4 Battery


1. over-charge protection
2. short-circuit protection
3. over-voltage protection
4. over- discharge protection
5. anti-reverse charging protection
6. over - current protection
7. over-power protection
8. recovery protection
9. temperature protection

Specification of Residential Battery Storage System

Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal capacity (kwh)	2.56	5.12	10.24
Nominal voltage	51.2V		
Cell type	LiFePO4		
Standard charge voltage	58.4V (adjustable)		
Max discharge current	40A	80A	120A
Discharge cut-of voltage	40V (adjustable)		
Max discharge current	50A	100A	200A
Parallels Function	Support 8 units in parallels		
Communication interface	RS485, RS232, CAN		
Cycle life	>6000 Cycles(80%DOD)		
Charge temperature range	0~65°C		
Discharge temperature range	-20~65°C		
Color	white		
Dimension(mm)	550x440x125	600x510x173	800x710x273
Weight	29kg	47kg	80kg
Installation method	Wallmounted/Floor type		



Connection diagram

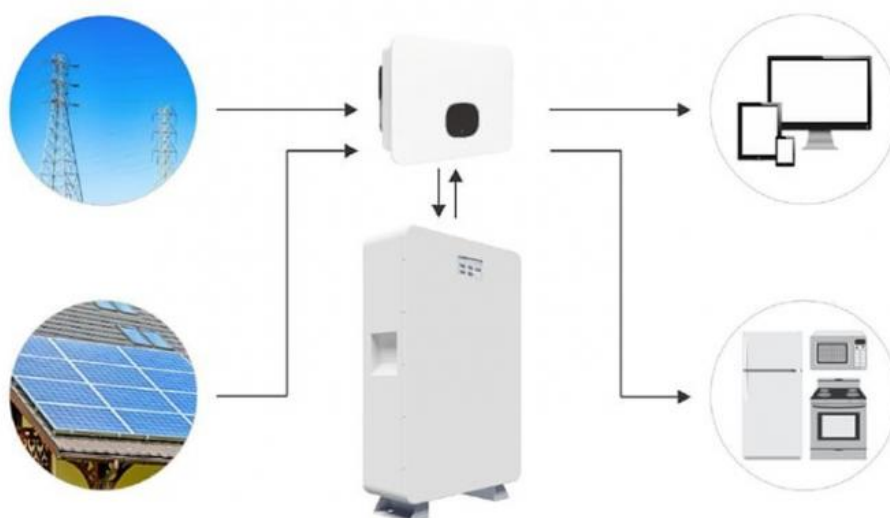


Home Energy Storage System Operation Pannel




- ① Output negative pole
- ② Output positive pole
- ③ RS232 communication port (software update)
- ④ RS485/CAN communication port (communicate with inverter)
- ⑤ Switchs for address

Home Energy Storage System Size

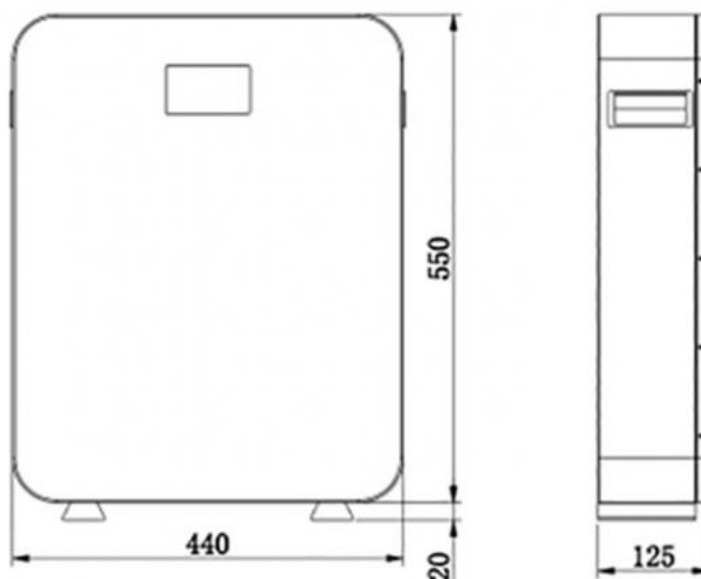


Home Energy Storage System Single Battery Pack Wiring Diagram

Single battery pack wiring diagram

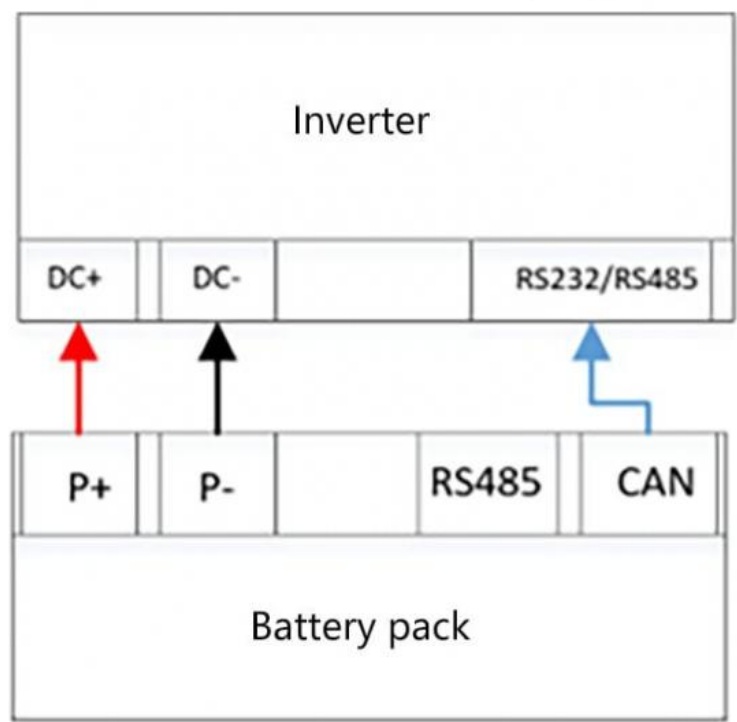

Home Energy Storage System Parallels Connection Wiring Diagram

Parallel connection wiring diagram of multiple battery packs

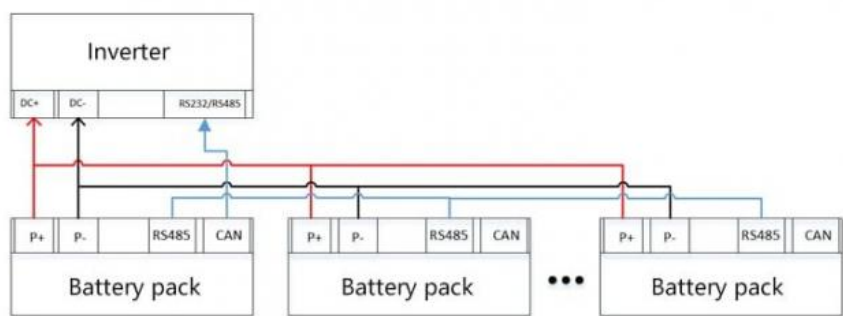

FAQ

1. Q: How can you guarantee quality?

A: We have a perfect pre-sales service and after-sales service system. We will start to track the whole process from the factory production, and there will be a service specialist to provide you with exclusive service, so as to ensure that there is no problem in the entire order process.

2. Q: Do you provide samples?

A: Yes, sample orders are welcomed.

3. Q: Do you provide OEM&ODM service?

A: Yes, we provide OEM&ODM service for most of our products. Please contact our sales manager for details.

4. Q: What can you buy from us?

A: Solar Panel, BIPV, Solar cleaning robot, Battery, Portable power supply, and other solar energy products. If you have any needs, you can contact our sales managers. We will find the best solution for you.

5. Q: Are the products in stock?

A: For most products, we have inventory and will arrange delivery in time. For large orders, we will calculate the delivery time accordingly and communicate with you.

XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China