



5kwh 48v Lithium Energy Storage Battery Pack Rackmount 6000 Cycles

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-5120W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



Product Specification

- Nominal Voltage: 48V (Optional)
- Nominal Capacity: 100Ah (Optional)
- Nominal Energy: 5120wh (Optional)
- Cell Model: Prismatic LiFePO4
- Discharge Current: 50A
- Max Charge Current: 50A
- Discharge Cut-off Voltage: 42.5V
- Display: LCD Optional
- Communication Interface: RS485, RS232, CAN
- Cycle Life: >6000 Cycles(80%DOD)
- Highlight: **5kwh Energy Storage Battery Pack,
48v Energy Storage Battery Pack,
5kwh 48v lithium battery 6000 Cycles**

Product Description

Rackmount Energy Storage Battery Pack Lithium Server 5kwh 48V Rackmount Energy Storage Battery


Product Characteristics

1. Compatible, Compatible with Tier 1 inverter brands
2. Safety, Multi-protection from self developed BMS
3. Easy to Scale Up, Be workable to be parallel based on 48V
4. Easy installation, Compact Size and Module design help for quick installation
5. Long Life, Span 15-20 years Life design. Up to 6000 + Cycle life
6. OEM Supported, Low MOQ for OEM order. Built your own brand

Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO4		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm


Operation Pannel of Rackmount Lithium Battery

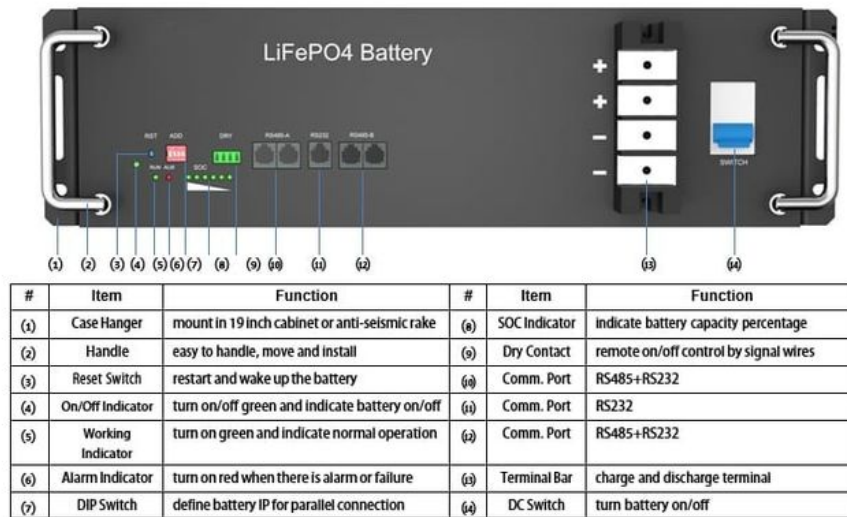

Size of Rackmount Lithium Battery

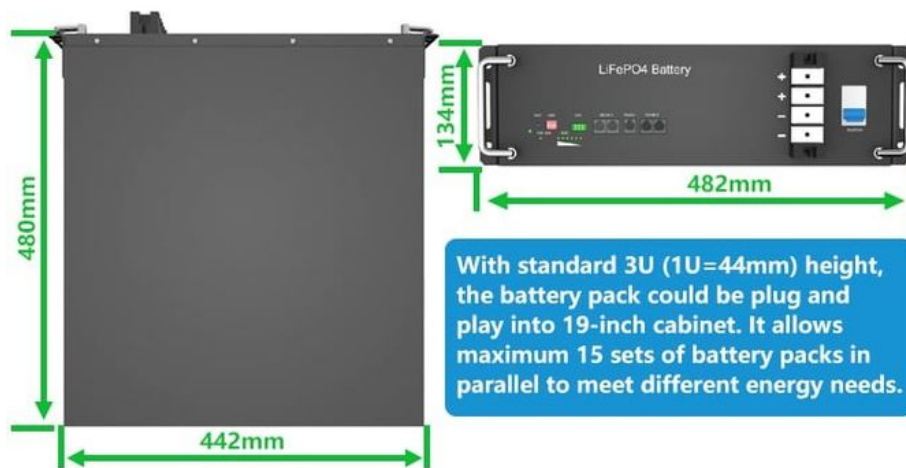

Structure of Rackmount Lithium Battery

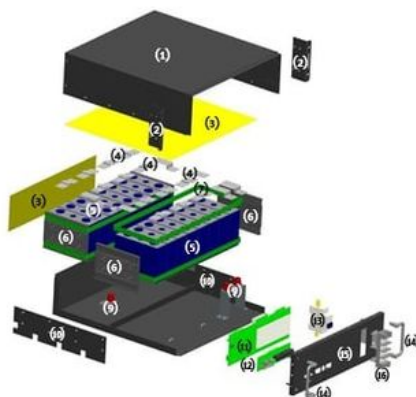

#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	/
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	/

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Delivery time

3-5 days for sample order, 7-15 days for bulk order

Payment

For bulk orders, 30% TT as deposit and 70% TT before delivery of goods,

Package

Custom solution knocked down packing for different design.

Loading port: Guangzhou/Shenzhen China

Satisfaction Guarantee

We're proud of our products. If you aren't satisfied, we'll refund you for any reason within a year of purchase.



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China