



## Lithium Ion Battery 51.2V 2.5KWH 5KWH 10KWH 15KWH Rack Mounted Energy Storage Cabinet Battery

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-5120W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



### Product Specification

- Battery Type: LiFePO4
- System Type: Rack-mounted
- Pack Capacity: 50Ah 100Ah 200Ah
- Pack Energy: 2.56Kwh 5.12Kwh 10.24Kwh (Optional)
- Discharge Current: 50A
- Max Charge Current: 50A
- Discharge Cut-off Voltage: 42.5V
- Display: LCD Optional
- Communication Interface: RS485, RS232, CAN
- Cycle Life: >6000 Cycles(80%DOD)
- Highlight: **Rack Mounted Energy Storage Cabinet Battery, 10KWH Rackmount Lithium Battery, 15KWH Rackmount Lithium Battery**

for more products please visit us on [esslithiumbattery.com](http://esslithiumbattery.com)

## Product Description

### Lithium Ion Battery 51.2V 2.5KWH 5KWH 10KWH 15KWH Rack Mounted Energy Storage Cabinet Battery

#### Introduction:

Our energy storage battery packs use Gotion High-tech **Top-ranked A-class automotive LiFePO4 cells** for greater safety and longer battery cycle life, up to 5000 cycles at 80% DOD. All-aluminium body design ensures a larger heat dissipation area.

We are responsible for our customers and our brand. All use **Gotion High-tech Top-ranked A-class automotive batteries**

**Use only the highest quality batteries Batteries that use the same standard as the country**


#### Product advantages

- ◇ Gotion High-tech Top-ranked A-class automotive batteries
- ◇ Safe and reliable lithium iron phosphate battery
- ◇ Multiple protection of software and hardware
- ◇ Multi-brand and multi-model inverter compatibility

#### Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO4		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

#### Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm


Operation Pannel of Rackmount Lithium Battery

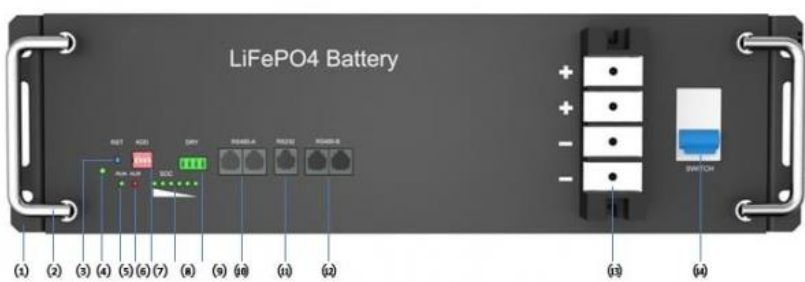

#	Item	Function	#	Item	Function
(1)	Case Hanger	mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	Indicate battery capacity percentage
(2)	Handle	easy to handle, move and install	(9)	Dry Contact	remote on/off control by signal wires
(3)	Reset Switch	restart and wake up the battery	(10)	Comm. Port	RS485+RS232
(4)	On/Off Indicator	turn on/off green and indicate battery on/off	(11)	Comm. Port	RS232
(5)	Working Indicator	turn on green and indicate normal operation	(12)	Comm. Port	RS485+RS232
(6)	Alarm Indicator	turn on red when there is alarm or failure	(13)	Terminal Bar	charge and discharge terminal
(7)	DIP Switch	define battery IP for parallel connection	(14)	DC Switch	turn battery on/off


Size of Rackmount Lithium Battery





With standard 3U (1U=44mm) height, the battery pack could be plug and play into 19-inch cabinet. It allows maximum 15 sets of battery packs in parallel to meet different energy needs.

Structure of Rackmount Lithium Battery

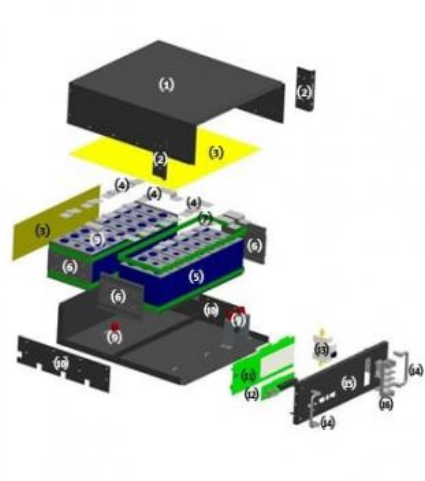

#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	/
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	/

Application of Rackmount Lithium Battery

## Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

### What We Offer?

Supply chain solution, strict quality control, real-time response  
OEM/ODM Manufacturer, custom sizes and shapes available on request  
Suggestion of new design or material, new technology and cost structure  
Engineers team at your service  
Flexible small orders are acceptable  
One-stop supply to eliminating messy links



**XWELL** GUANGDONG XWELL TECHNOLOGY CO., LTD.

+86 18620492985

sales@esslithiumbattery.com

esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China