



## Stackable Home Energy Storage Rechargeable Battery

### Our Product Introduction

#### Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-5120W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



#### Product Specification

- Communication: Available
- Origin: China
- Pack Capacity: 50Ah 100Ah 200Ah
- Pack Energy: 2.56Kwh 5.12Kwh 10.24Kwh (Optional)
- Discharge Current: 50A
- Max Charge Current: 50A
- Discharge Cut-off Voltage: 42.5V
- Display: LCD Optional
- Communication Interface: RS485, RS232, CAN
- Cycle Life: >6000 Cycles(80%DOD)
- Highlight: **Stackable Home Energy Storage Rechargeable Battery**  
**, Home Energy Storage Rechargeable Battery**

## Product Description

### Stackable Home Energy Storage Rechargeable Battery

The product adopts isolated communication design, supports RS485/CAN communication mode, RS485 communication default baud rate is 9600 bps, 8 bit data bit, 1 bit stop bit, no test bit; The default baud rate of CAN communication is 500Kbps;

Q. Can I print my LOGO on it?

A: YES, LOGO/sticker/OEM/ODM welcomed

Q. Can your battery be wired in series or parallel?

A: YES, YOU can connect up to ANY of these batteries in parallel. For series, suggest within 3 units.


Q. Can the bms be removed and replaced if it breaks? Can the case be opened to replace a bad cell?

A: YES, the case can be opened to replace the BMS & cells on the guidance of engineer.

#### Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO4		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

#### Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm


#### Operation Pannel of Rackmount Lithium Battery

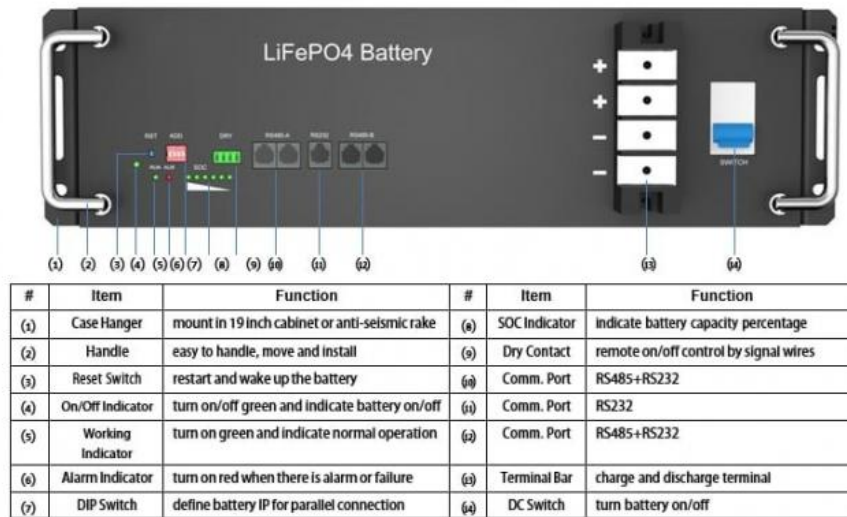

### Size of Rackmount Lithium Battery

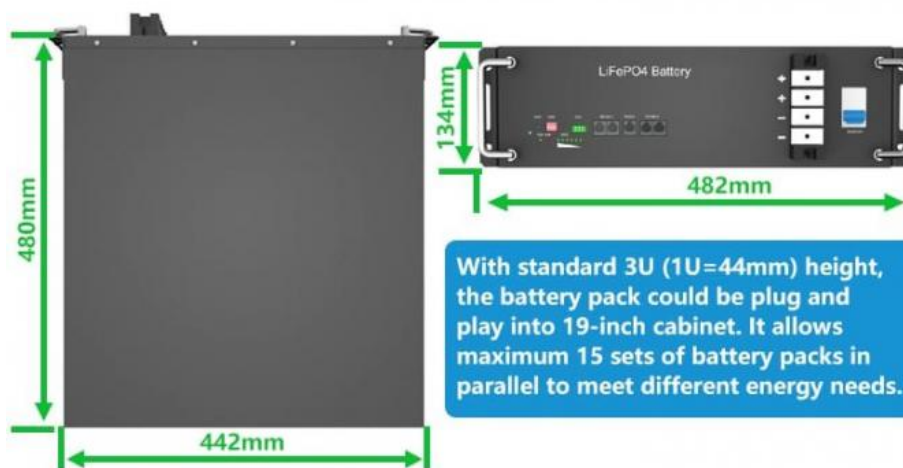

### Structure of Rackmount Lithium Battery

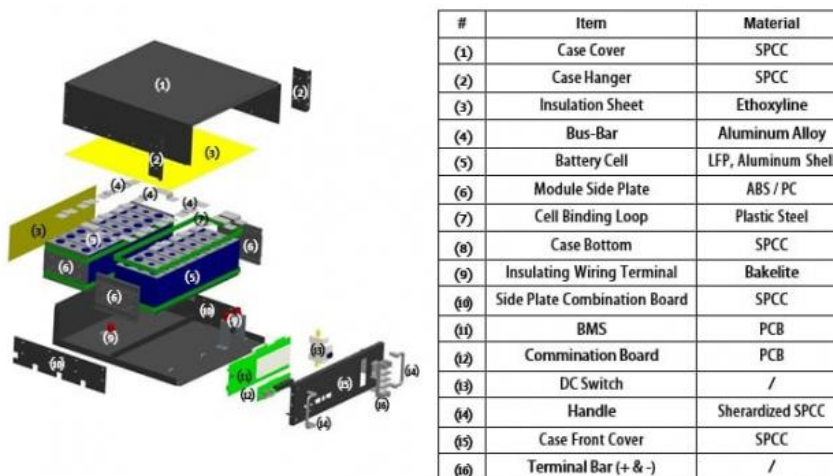

### Application of Rackmount Lithium Battery

## Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

### What We Offer?

Supply chain solution, strict quality control, real-time response  
OEM/ODM Manufacturer, custom sizes and shapes available on request  
Suggestion of new design or material, new technology and cost structure  
Engineers team at your service  
Flexible small orders are acceptable  
One-stop supply to eliminating messy links



**XWELL** GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China